


IMPORTANT! KEEP THIS MANUAL FOR FUTURE REFERENCE

**INSTRUCTION MANUAL
FOR USE OF CAR SEAT "CAMINO"**

**CAR SEAT
CAMINO**

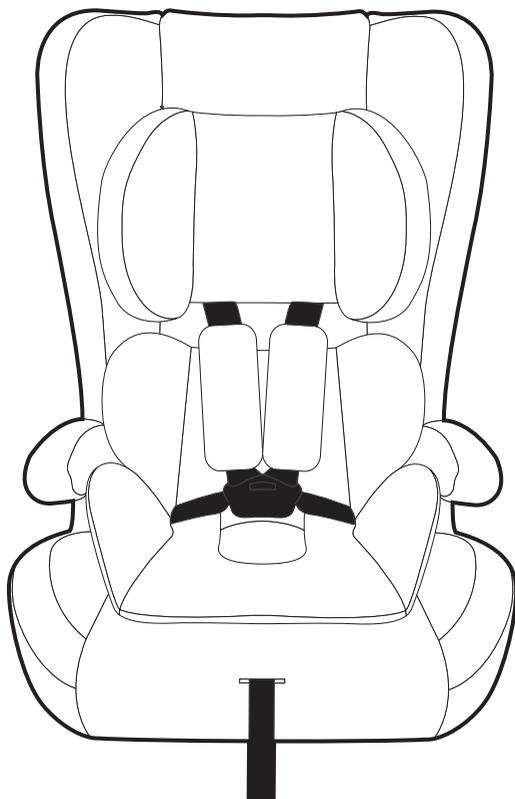

This child restraint system **chipolino** is designed and manufactured in compliance with the requirements of Regulation 44 of the United Nations Economic Commission for Europe concerning the safe transportation of children, the provisions of the product safety directive 2001/95/EU of the European Parliament and The Council and Directive 91/671/EEC "Compulsory use of seat belts and child restraints systems for child occupants of power driven vehicles" of the European Parliament and The Council.

NOTICE

GROUP I (9-18 kg), GROUP II (15-25kg) and GROUP III (22-36 kg)

1. This is a "UNIVERSAL" CHILD RESTRAINT SYSTEM. It is approved (№ E13*44R00*44R04*5136*00), to Regulation No 44, series 04 for general use in most, but not all vehicles.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint for these age groups.
3. This child restraint has been classified as "Universal" under more stringent conditions than those which applied to earlier designs which do not carry this notice.
4. If in doubt, consult either the child restraint manufacturer or the retailer.




DO NOT FORGET THAT NO RESTRAINT SYSTEM CAN PROVIDE ABSOLUTE PROTECTION IN CASE OF A CRASH OR ROAD ACCIDENT! DRIVE WITH CARE WHEN THERE IS A CHILD IN YOUR VEHICLE!

IN ORDER TO ENSURE THE SAFETY OF YOUR CHILD, FOLLOW EXACTLY THE INSTRUCTIONS AND SAFETY RECOMMENDATIONS IN THIS MANUAL!

MISUSE OF THE CAR SEAT WILL CONTRIBUTE TO REDUCING ITS SECURITY AND SAFETY FEATURES! FAILURE OF THE GUIDELINES OF THIS INSTRUCTION INCREASES THE RISK OF SERIOUS INJURY OR DEATH!


PLACE OF THE CAR SEAT IN THE VEHICLE



The car seat is suitable for use in vehicles fitted with three-point static belt with a retractable mechanism that meets the requirements of Regulation № 16 of the Economic Commission for Europe of the United Nations!

✓ Correct position / Appropriate

✗ Incorrect position / Not appropriate

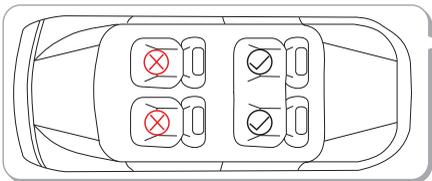

- Always install the child restraint system in "FORWARD FACING" position and never install or use it in "REARWARD" position!
- Place the car seat only on forward facing seats, and not on rearward or side facing!
- Do not install the car seat on front passenger seat !


- **CAUTION! NEVER LEAVE YOUR CHILD UNATTENDED!**

- **CAUTION!** THE CAR SEAT MUST BE INSTALLED ONLY ACCORDING TO THE DESCRIBED INSTRUCTIONS IN THIS MANUAL. IT IS DANGEROUS TO USE ANCHOR POINTS OTHER THAN THE ONES GIVEN IN THIS MANUAL!
- **CAUTION!** USE THE LAP VEHICLE BELT IN SUCH WAY THAT IT STAYS LOW AT CHILD'S BODY AND HOLDS HIS PELVIS
- **CAUTION!** THIS CHILD RESTRAINT SHOULD NOT BE MODIFIED OR ADAPTED WITH NEW FITTINGS, WITHOUT PREVIOUS AUTHORIZATION BY THE COMPETENT AUTHORITY.
- **CAUTION!** KEEP AWAY FROM FIRE!
- Installation in the vehicle and securing the child in the car seat to be done only by adult!
- The hard parts and the parts of the child restraint made of plastic should be located and installed so that when the vehicle is in normal use, they can not be trapped by a sliding seat or in a door of the vehicle.
- Always check if the vehicle belt is well attached and secures the child. It is very important that the lap belt is laying low and the child's hips are snug.
- Make sure the safety belts of the car seat and the vehicle are not twisted, frayed or torn, latches and locks (buckles) must be always in good order and firmly fixed.
- If you find defect or damage in the construction, discontinue usage until removal of the damaged parts and replacement with new ones.
- After a violent impact the car seat and belts may be damaged. therefore, it is recommended to replace the car seat with new one.
- Never use a second hand child restraint. it may have suffered structural damage, which may make the child restraint extremely dangerous.
- Do not use this car seat without its seat cover and do not replace it with a new one, unless supplied by the manufacturer. The fabric parts are integral parts of the restraint system and its safety features!
- Always make sure that you are not carrying any unsecured objects, especially on the back shelf, which, in case of an accident, may injure the car's occupants.
- Do not put additional pads except the ones supplied from the manufacturer! Placing additional pads may obscure the safety of your child.
- Do not use spare parts and other components not supplied by the manufacturer. The manufacturer assumes no responsibility for safety in the event that are used spare parts other than original.
- It is recommended to cover the car seat if the vehicle is parked under strong sun shine – extreme sun exposure will make the plastic to deteriorate and the fabric to fade. Please, check that the child restraint has not become too hot before placing your child seat.
- The car seat does not replace the child's cot or bed. When a child needs a sleep, you have to place him in a suitable baby stroller, baby crib or bed.
- Do not attach objects with long cords or strings on the car seat in order to avoid danger of suffocation!
- Never place a child seat on beds, couches or similar soft surfaces!
- Do not allow children to play with the product!
- Do not remove stickers and warnings – they contain important information!
- The packaging of the product must be kept out of the reach of children at the time of and after unpacking in order to avoid the risk of strangulation!

PRODUCT FEATURES

- Child restraint system suitable for children weighing 9 - 36 kg (Group I 9-18 kg, Group II 15-25 kg, Group III 22-36 kg);
- Child restraint must be installed in FORWARD facing position;
- 5-point safety harness;
- Backrest can be separated from the seat.

MAIN PARTS DIAGRAM

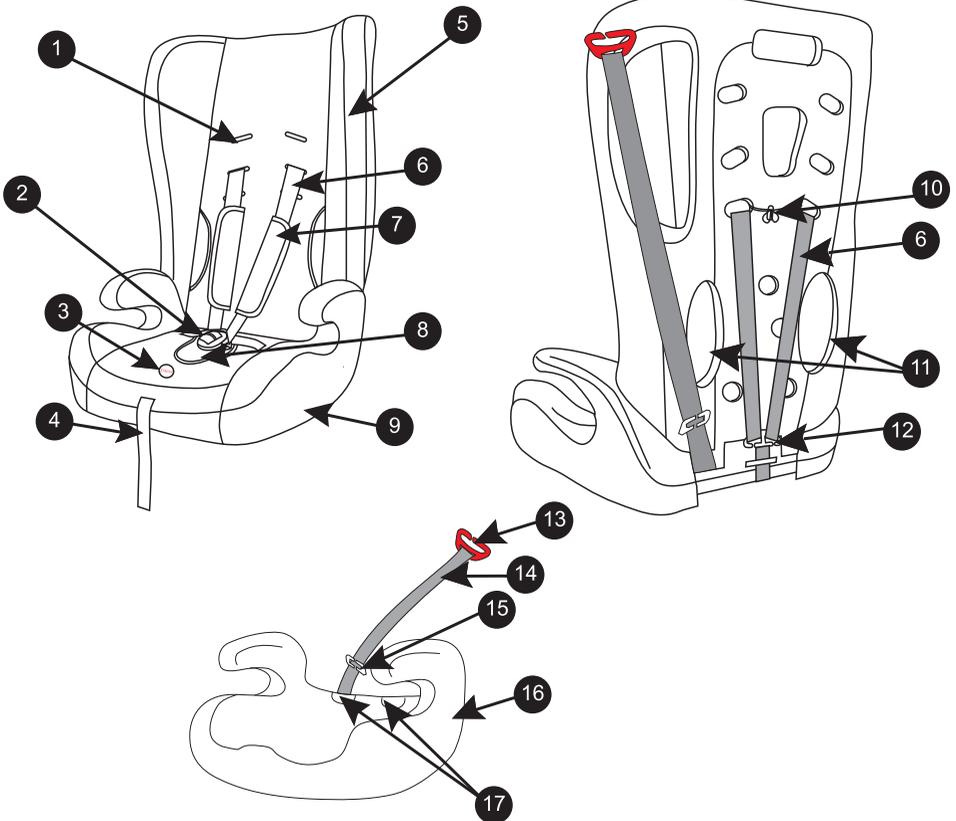

1	Shoulder straps slots	10	Ties of soft head cushion
2	Central safety harness buckle	11	Belts guides for vehicle belts
3	Harness length adjusting button	12	Metal connector of the straps f safety harness
4	Harness length adjusting strap	13	Bracket for adjusting the diagonal vehicle belt
5	Backrest	14	Bracket strap
6	Shoulder straps	15	Adjusting buckle for bracket strap
7	Shoulder pads	16	Seat
8	Soft crotch pad	17	Openings for mounting the backrest of the car seat. Axles for mounting the bracket strap
9	Seat textile cover		

INSTRUCTION FOR USE

IMPORTANT!

- Follow exactly the instructions and safety recommendations in this manual.
- Check the security of fixing after each operation!
- ALWAYS CHECK THE SECURITY OF FIXING OF THE SAFETY BELTS!

1 – HEIGHT OF SHOULDER STRAPS

IMPORTANT: Shoulder straps must be at the level of the child's shoulders.

2 - LOOSENING AND TIGHTENING THE HARNESS

3 – SAFETY HARNESS BUCKLE. FASTENING AND UNFASTENING

4 – INSTALLATION FOR GROUP I (9-18 kg)

CAUTION! Secure the child with the 5-point safety harness of the car seat.

5 – REMOVAL OF SAFETY HARNESS

6 – MOUNTING AND ADJUSTING THE BRACKET STRAP

7 - INSTALLATION FOR GROUP II (15-25kg)

ATTENTION! Secure the child with the 3-point vehicle belt.

IMPORTANT! When using the car seat for children with weight 15 - 25 kg (group II), remove the safety 5-point harness of the car seat.

8 – INSTALLATION FOR GROUP III (22-36kg)

IMPORTANT! When using the car seat for children with weight 22 - 36 kg (group III), remove the backrest of the car seat.



9 - REMOVAL OF THE FABRIC COVER

- Remove the belts in the described in fig. 5 way;
- Recline the seat until it is horizontal and remove it;
- Take out the cover.


To put the fabric cover back, follow the same steps in reverse order.





1-2

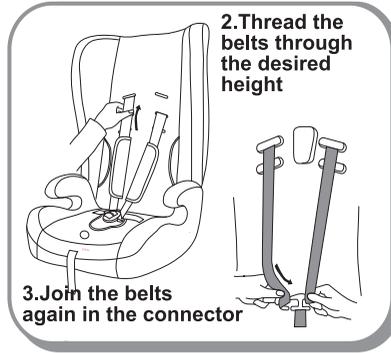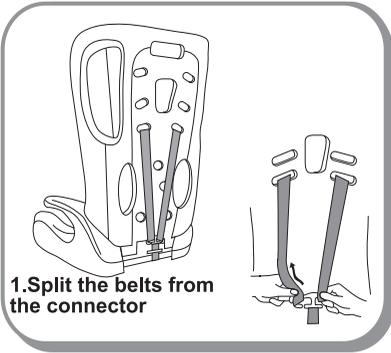

2

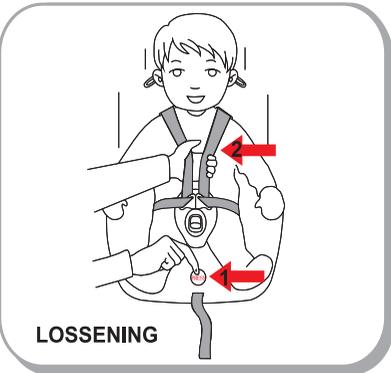

3



4

Please, the car seat on the vehicle seat

Diagonal belt

Lap belt

1

2

3

4

Tighten the belt

5

GROUP I (9-18kg)

5

Loosen the belts

Remove the bracket strap

Split the shoulder straps from the connector

View from the bottom

1


2

3

4

5

6




IMPORTANT!


II group: the bottom end of the bracket strap is mounted on the axle which is away from the vehicle belt buckle

III group: the bottom end of the bracket strap is mounted on the axle which is on the same side as the vehicle belt buckle

BRACKET STRAP LENGTH ADJUSTMENT



BELT FIXING




RELEASE OF THE BELT





7


GROUP II (15-25 kg)



8

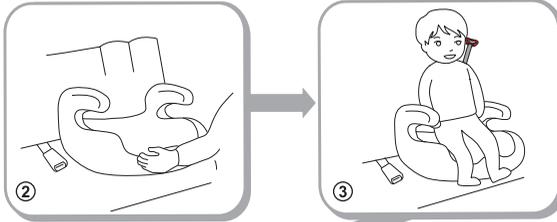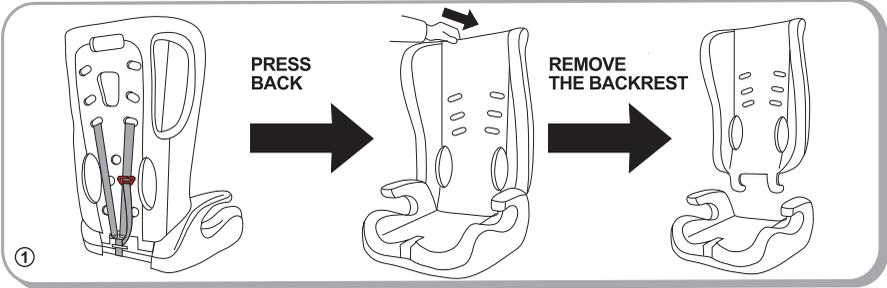

**GROUP III
(22-36 kg)**

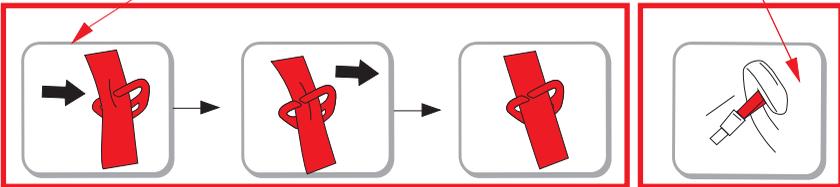

CLEANING AND MAINTENANCE INSTRUCTIONS

- Clean the fabrics, plastic parts and metal parts with damp cotton cloth or sponge and mild soap.
- Upholstery may be hand washed at 30°C using mild detergent!
- Do not bleach! Do not tumble dry! Do not machine wash! Do not iron!
- Do not use abrasive, bleach or other aggressive detergents.
- Always after cleaning leave the car seat fully dry and after that use it or store it.
- Harnesses must be cleaned with damp cloth and mild soap!
- Do not wet or remove the stickers. They contain important information!
- Always store your car seat indoors – on dry and clean place. Do not expose to direct environment influence - sun, rain, moisture and high temperature intervals.
- Please, contact your authorized dealer for problems connected with the use or repair

Fabric:

Outer: 100% polyester

Filling: 100% polyester



Used materials: metal, plastic, textile.

STKCM01xxxx



Bulgaria, Plovdiv, Str. Golyamokonarsko shosse № 1
www.chipolino.com