

**SEE-ME™**

See-Me™ Light 1.0: Model 20-51150-08  
See-Me™ Strobe 1.0: Model 20-51152-08

Ultimate Survival Technologies  
Jacksonville, FL  
(904) 786-0033  
www.ultimatesurvival.com

## See-Me 1.0 Owner's Guide

### Description

The See-Me™ Light and See-Me™ Strobe are for use on all Personal Flotation Devices (PFDs), life-jackets, and immersion suits. Both models are U.S. Coast Guard approved under regulation 46 CFR 161.012 for domestic (non-SOLAS) use. See-Me™ Light sends out a steady stream of light, while the See-Me™ Strobe emits flashing light. It is the responsibility of the user to ensure that the light is attached securely to the PFD, life-jacket, or immersion suit. The See-Me™ Light is supplied with a cord lanyard and a hook and loop fastener strap. Both can be secured to other attachment points on inherently buoyant PFDs & life-jackets.

### Battery Changing Instructions

Batteries not included. Install two (2) unused consumer grade AAA-size alkaline batteries (1.5V, ANSI-24A, IEC-LR03). Old batteries can be thrown away. Replace annually to comply with USCG approval.\* Alternately, install two (2) unused consumer grade AAA-size Lithium batteries (1.5V, ANSI-24LF, IEC-FR03) marked with an expiration date. Old batteries should be disposed of according to local hazardous waste regulations. Replace 5 years before expiration date to comply with USCG approval.\*

Do not mix old and new batteries. Do not mix with different battery types.


**WARNING: Do not recharge or incinerate batteries!**

#### To Install/Replace Batteries:


1. Remove Top.

Refer to FIGURE 1.

- ① Push top down and turn counterclockwise...
- ② ...until OPEN arrow on the top aligns with arrow on the housing.
- ③ When arrows are aligned, pull top up to remove.

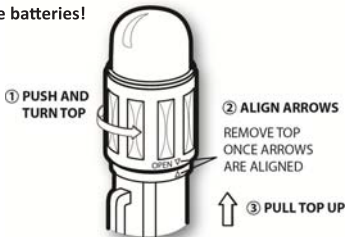


2. Use wire insert to pull batteries out of light housing. Refer to FIGURE 2.

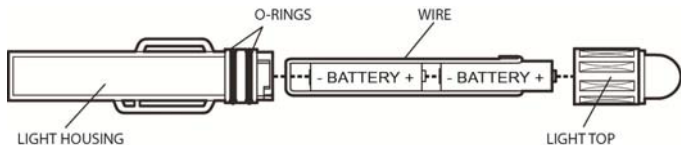

\*Replace battery if light is used or turned ON for an extended period of time.

3. Replace wire insert into light housing.
4. Install two (2) new AAA batteries with + end facing upward.
5. Replace Top:  
Refer to FIGURE 3.
  - ① Align OPEN arrow on top with arrow on housing.
  - ② Push down on top.
  - ③ While pushing down on top, rotate top clockwise until light turns ON, then rotate counterclockwise to OFF position.

FIGURE 3

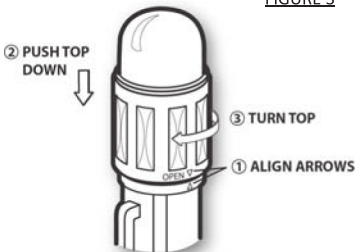


## Operating Instructions

Refer to FIGURE 4.

**Turn ON:** Slowly turn the top clockwise until the ON mark on the top aligns with the arrow mark on the housing.

**Turn OFF:** To deactivate, turn the top counterclockwise until the OFF mark on the top aligns with the arrow on the housing.

FIGURE 4

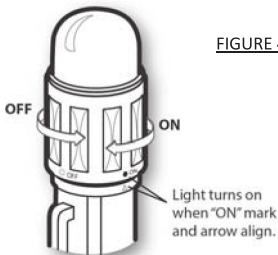

## Attachment to PFDs

Use hook and loop fastener strap or cord lanyard provided with the light to secure light to webbing strap or other attachment points on the PFD, life-jacket, or immersion suit.

## Maintenance and Disposal

The See-Me Light™ and See-Me™ Strobe should be checked periodically for any signs of damage or corrosion. Follow the steps in the operating instructions section of this manual to test the function of the light.

Dispose of used batteries in accordance with local regulations.

Check that the two O-rings on the body are in position and not damaged. Water will enter the light if O-rings are not in place. Replace light if O-ring is either missing or damaged.