

VFI 1000-3000 TG/ TGB/ TGS

- Human Interface Device (HID) supported
- An All-Rounder series
- It supports AC Generators
- It includes an Intelligent Slot
- Available with an Ext. Battery Port (TGB/ TGS)
- Available with a Stronger Charger (TGS)



Variation dependent



The PowerWalker VFI TG/ TGB/ TGS is a professional and versatile online UPS solution for almost all single-phase applications (suitable for security systems for kiosks, ATMs and as well as high-level security systems, where additional software is not allowed (i.e. banking)).

The UPS is available in 3 different variations:

TG: only with internal batteries for regular backup times.

TGB: with internal batteries and connection for external battery packs for extended autonomy times.

TGS: without internal batteries, but with a stronger charger for external battery packs and big capacity batteries (non-series batteries).

Thanks to the double converter technology, the UPS offers the best protection for sensitive systems. Additionally, the functionality is enhanced by a variety of communication options, such as HID, PowerWalker WinPower software or network cards.

General Features	TG	TGB	TGS	TG	TGB	TGS	TG	TGB	TGS
Power Capacity	1000VA/ 900W			2000VA/1800W			3000VA/ 2700W		
Output Power Factor	89.0%			90.0%			90.0%		
LINE Mode Full Load	89.0%			90.0%			90.0%		
Ext. Battery Connection	No	Yes		No	Yes		No	Yes	
Charger	1.5A		1.5A - 6A	1.5A		1.5A - 6A	1.5A		1.5A - 6A
Input Specifications									
Values									
Input Voltage Range	176-300 VAC or 80x285 VAC in Bypass Mode								
Frequency (Synchronized Range)	40Hz - 70Hz								
Input Type	IEC C14 or IEC C14 ^{UK}			IEC C14 or IEC C14 ^{UK}			IEC C20 or IEC C20 ^{UK}		
Output Specifications									
Values									
Nominal Output Voltage	220/230/240 VAC								
Voltage Regulation	+/- 2%								
Frequency (Battery Mode)	+/- 0.5Hz								
Outlets	IEC C13 (4)	IEC C13 (3)	IEC C13 (4)	IEC C13 (6)	IEC C13 (4) + IEC C19 (1)	IEC C13 (3) + Terminal (1)			
Battery Specifications									
Values									
Batteries	2 x 12V/ 9Ah		Ext. Battery	4 x 12V/ 9Ah		Ext. Battery	6 x 12V/ 9Ah		Ext. Battery
DC Voltage	2 x 12V		-	4 x 12V		-	6 x 12V		-
Recharge Time	4h to 90%								
Full Load Backup Time	3.7 min		-	3.8 min		-	3.9 min		-
Half Load Backup Time	10.5 min		-	11 min		-	11.7 min		-
Transfer Time [AC to Battery]	0 ms								
Transfer Time [Inverter to Bypass]	4 ms								


VFI 6K-10K TGB/ TGS

- Unity Power Factor 1.0 (kVA = kW)
- Multiple Accessories are available
- Wide input voltage range for all environments
- Includes an Intelligent Slot



Available with a Stronger Charger (TGS)

Variation dependent

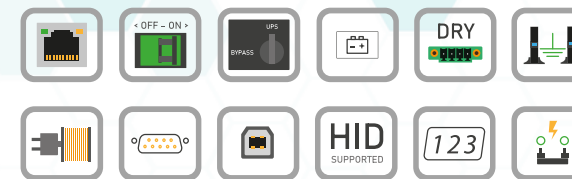

The PowerWalker VFI 6k-10k TGB/ TGS is a professional series for commercial applications featuring Unity Power Factor (PF=1.0), a wide input voltage range and high efficiency (up to 95%).

The UPS is available in 2 different variations:

TGB: with internal batteries and connection for external battery packs for extended autonomy times.

TGS: without internal batteries, but with a stronger charger for external battery packs and big capacity batteries (non-series batteries).

General Features	TGB	TGS	TGB	TGS
Power Capacity	6000VA/ 6000W		10000VA/ 10000W	
Output Power Factor	1.0			
LINE Mode Full Load	95.0%			
Parallel Work (Units)	Up to 3 of the same size			
Charger	0-4A [1.4A]	0-12A [4A]	0-4A [2A]	0-12A [4A]
Input Specifications				
Values				
Input Voltage Range	160-276 VAC at 100% Load 110-160 VAC at 50% Load			
Frequency (Synchronized Range)	45Hz - 55Hz at 50Hz or 54Hz - 66Hz at 60Hz			
Input Type	Terminal			
Output Specifications				
Values				
Nominal Output Voltage	208/220/230/240 VAC			
Voltage Regulation	+/- 1%			
Frequency (Battery Mode)	+/- 1Hz			
Outlets	Terminal			
Battery Specifications				
Values				
Batteries	16 x 12V/ 7Ah	Ext. Battery	16 x 12V/ 9Ah	Ext. Battery
DC Voltage	16 x 12V			
Recharge Time	4h to 90%	-	4h to 90%	-
Full Load Backup Time	4 min	-	2 min	-
Half Load Backup Time	11 min	-	8 min	-
Transfer Time [AC to Battery]	0			
Transfer Time [Inverter to Bypass]	0			